


GRF2013	5.0/90/1.9	18.5	1.3	22.5	38.5	0.05 to 8.0	2.7 to 5.0	15 to 100	
GRF2014	5.0/150/0.9	15.9	3.4	24.0	43.5	0.05 to 3.8	2.7 to 5.0	50 to 180	
GRF2093*	5.0/70/2.5	21.0	0.38	19.0	36.0	1.0 to 6.0	2.7 to 5.0	20 to 100	
GRF2100	3.3/15/2.5	16.5	0.8	10.0	19.0	0.1 to 3.8	1.8 to 5.0	8 to 30	
GRF2105	5.0/70/2.5	20.5	0.75	22.5	37.0	0.4 to 5.0	2.7 to 5.0	20 to 90	
GRF2106*	3.3/15/2.5	20.5	0.8	12.0	26.0	0.1 to 4.2	1.8 to 5.0	10 to 40	
GRF2133	5.0/60/1.9	28.5	0.65	20.0	31.0	0.1 to 2.7	2.7 to 5.0	35 to 160	
GRF2140	3.3/15/1.9	18.0	1.1	9.3	20.0	0.1 to 3.8	1.8 to 5.0	8 to 30	Bypass Mode
GRF2373	3.3/15/1.9	18.5	1.3	13.5	25.0	0.1 to 3.8	2.7 to 5.0	10 to 25	
GRF2374	3.3/15/1.9	16.5	1.3	10.0	22.0	0.1 to 3.8	2.7 to 5.0	10 to 25	Bypass Mode
GRF2505	5.0/40/5.5	12.5	1.2	19.0	30.0	4.0 to 6.0	1.8 to 5.0	20 to 60	
GRF4001	3.3/45/2.5	15.5	0.9	16.5	30.5	0.1 to 6.0	1.8 to 3.6	15 to 50	
GRF4002	5.0/70/1.9	17.5	0.80	23.5	36.0	0.1 to 3.8	1.8 to 5.0	20 to 80	
GRF4003	5.0/95/1.9	15	0.80	24.5	41.0	0.1 to 3.8	1.8 to 5.0	20 to 120	
GRF4004	5.0/135/1.9	14.5	0.80	26.0	43.0	0.1 to 3.8	1.8 to 5.0	30 to 150	
GRF4005	5.0/170/1.9	15.0	0.80	26.5	42.0	0.1 to 3.8	1.8 to 5.0	50 to 200	
GRF4014	5.0/60/2.5	16.5	0.80	24.3	39.0	0.1 to 6.0	2.7 to 8.0	30 to 120	
GRF4142	3.3/50/1.9	15.3	0.90	19.3	33.0	0.1 to 3.8	1.8 to 5.0	15 to 80	Bypass Mode

* Coming Soon!

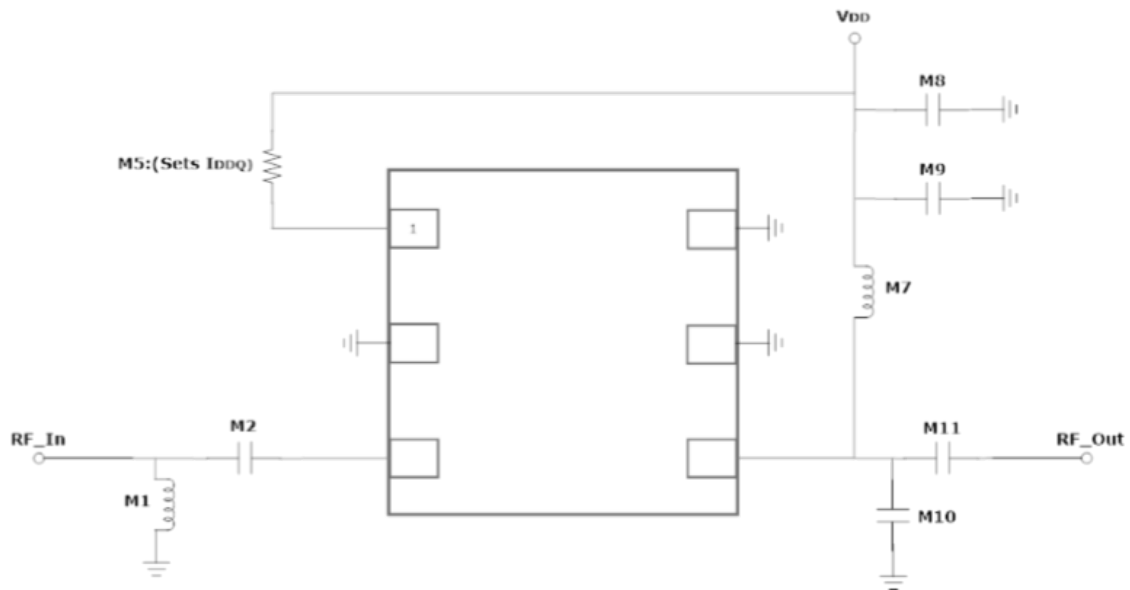

The above application schematic can accommodate most devices in this group over most frequency bands. New DFN-6 parts are being added to this family every month.

The Guerrilla RF applications engineering team is ready to assist you with custom matching, schematics, data collection and BOM recommendations. Contact us at applications@guerrilla-rf.com with any questions!

Next Month: In Part 2, we'll look at real-world examples of the design capabilities of these DFN-6 products. Stay tuned!