





GRF2133 (1650-2050 MHz)


# GRF2133 Schematic:

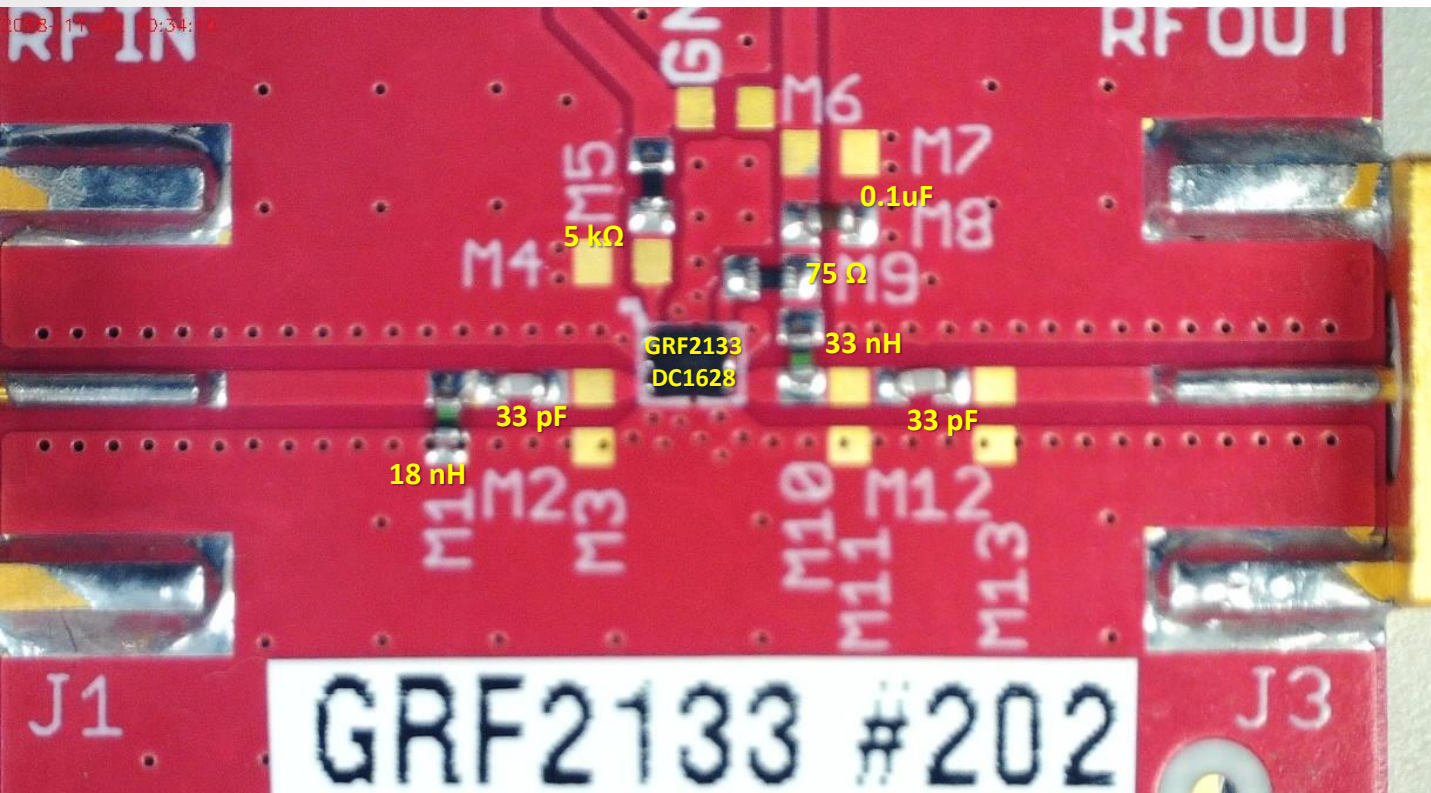

# GRF2133 Response:

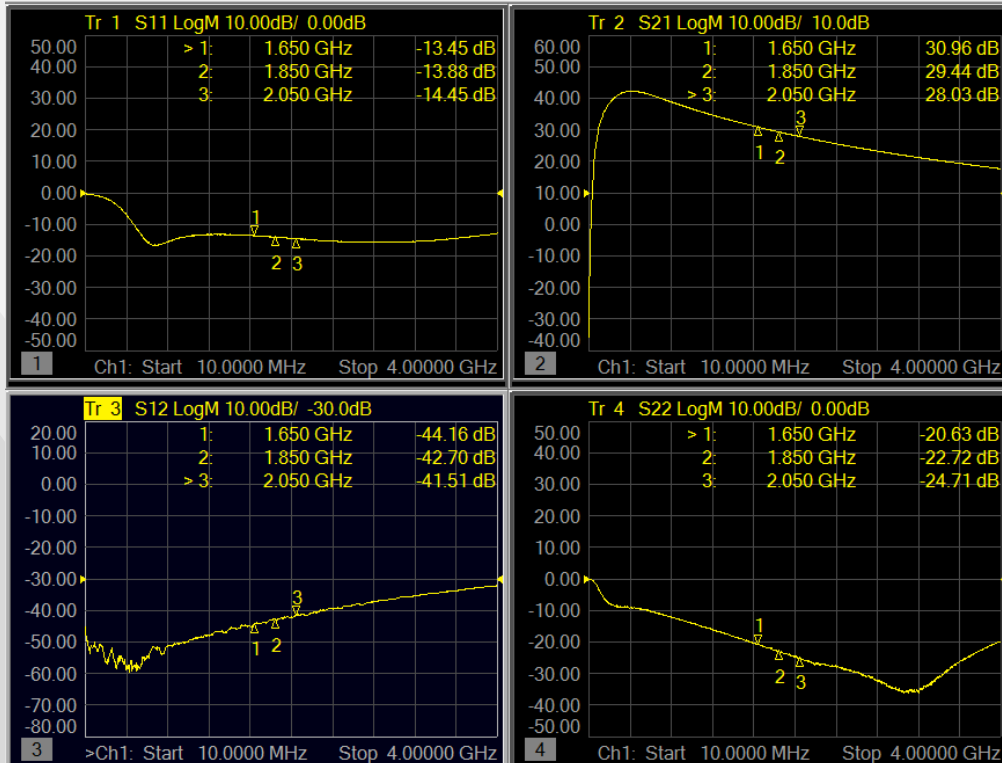

# GRF2133 Stability Mu Factor:

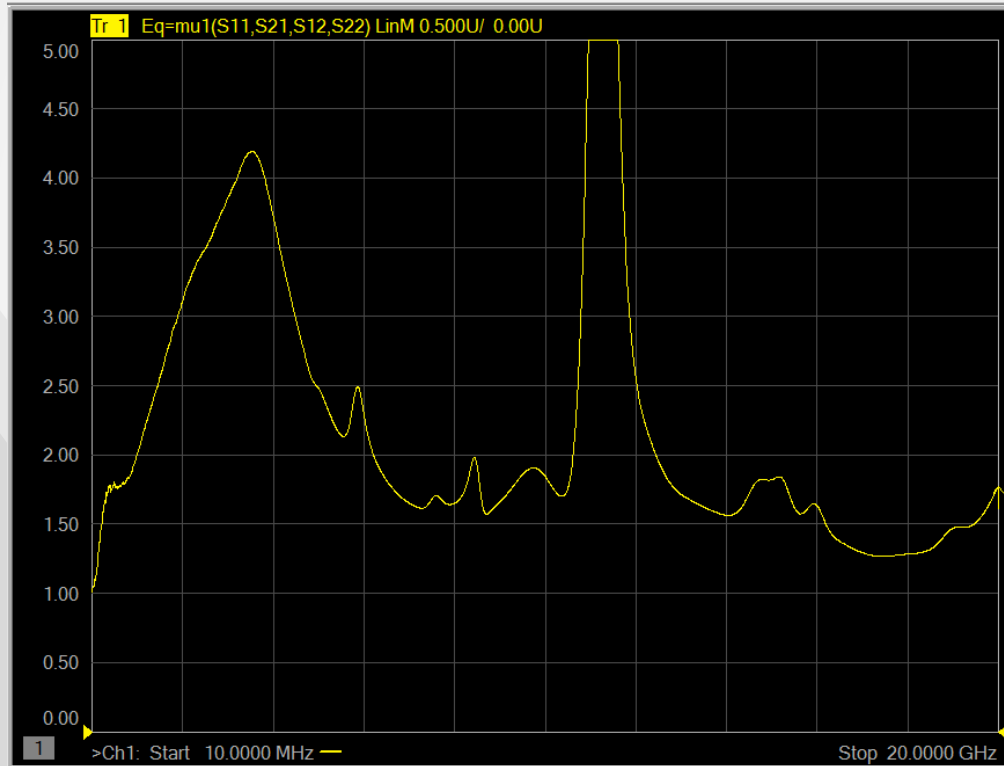

# GRF2133 Data:

Descriptor	Freq MHz	Vdd	Iddq mA	Ven	Ien mA	Pout/Ptone dBm	Gain dB	IIP3 dBm	OIP3 dBm	IP1dB dBm	OP1dB dBm	EVB NF
GRF2133 #202	1650	5	67.8	5	1.7	2.027	31.0273	0.4302	31.4575	-9.2	20.842	0.47
GRF2133 #202	1850	5	67.8	5	1.7	2.018	29.5069	2.16265	31.6695	-7.6	20.904	0.52
GRF2133 #202	2050	5	67.8	5	1.8	2.017	27.9384	3.49515	31.4335	-6	20.953	0.59



## **Jeff Broxson**

*Vice President - Sales*

Phone (336) 339-9314

[jbroxson@guerrilla-rf.com](mailto:jbroxson@guerrilla-rf.com)

## **Alan Ake**

*Vice President - Applications/Technical Marketing*

Phone (336) 708-4581

[aake@guerrilla-rf.com](mailto:aake@guerrilla-rf.com)

## **Guerrilla RF**

1196 Pleasant Ridge Road, Suite 5  
Greensboro, NC 27409

Phone: (336) 510-7840

[www.guerrilla-rf.com](http://www.guerrilla-rf.com)