





GRF5115 (300 - 320 MHz)

#241


# GRF5115 Schematic:

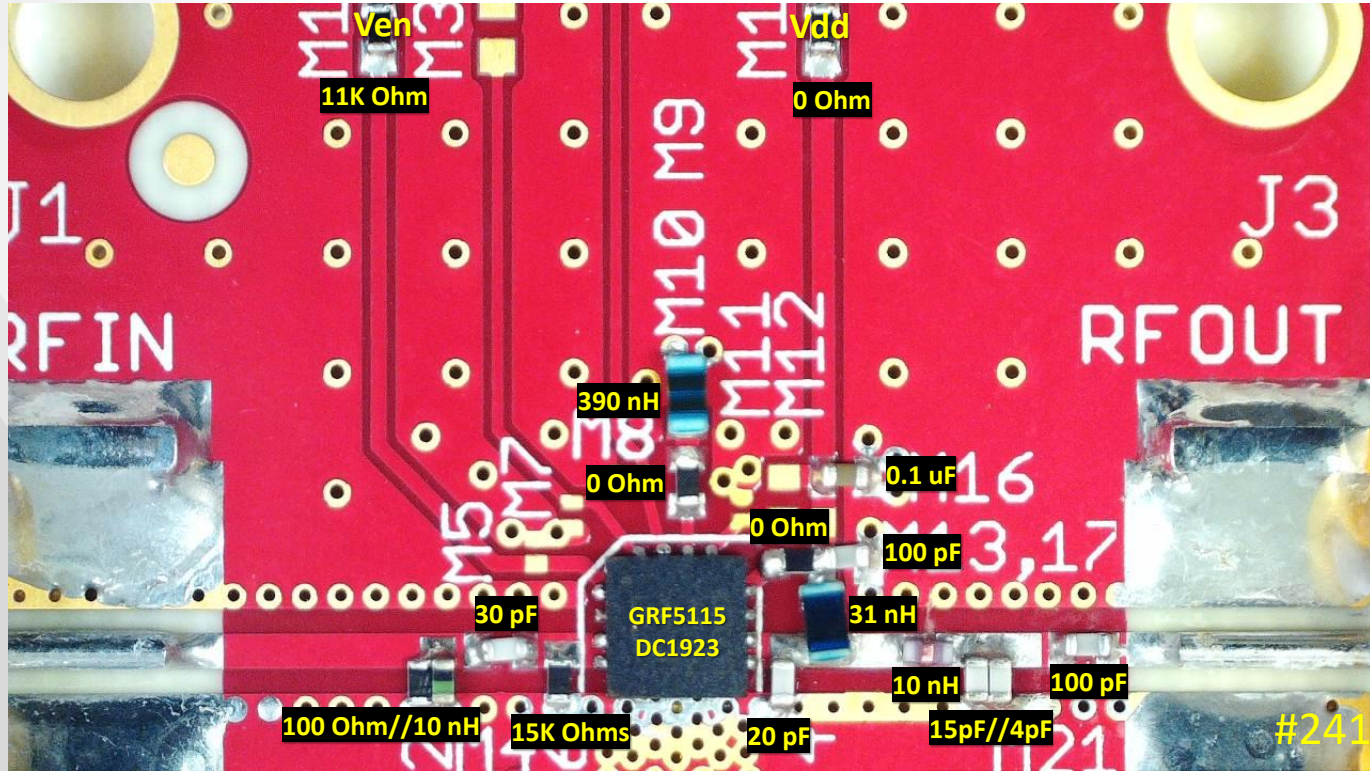


# GRF5115 Response 5V 213mA:

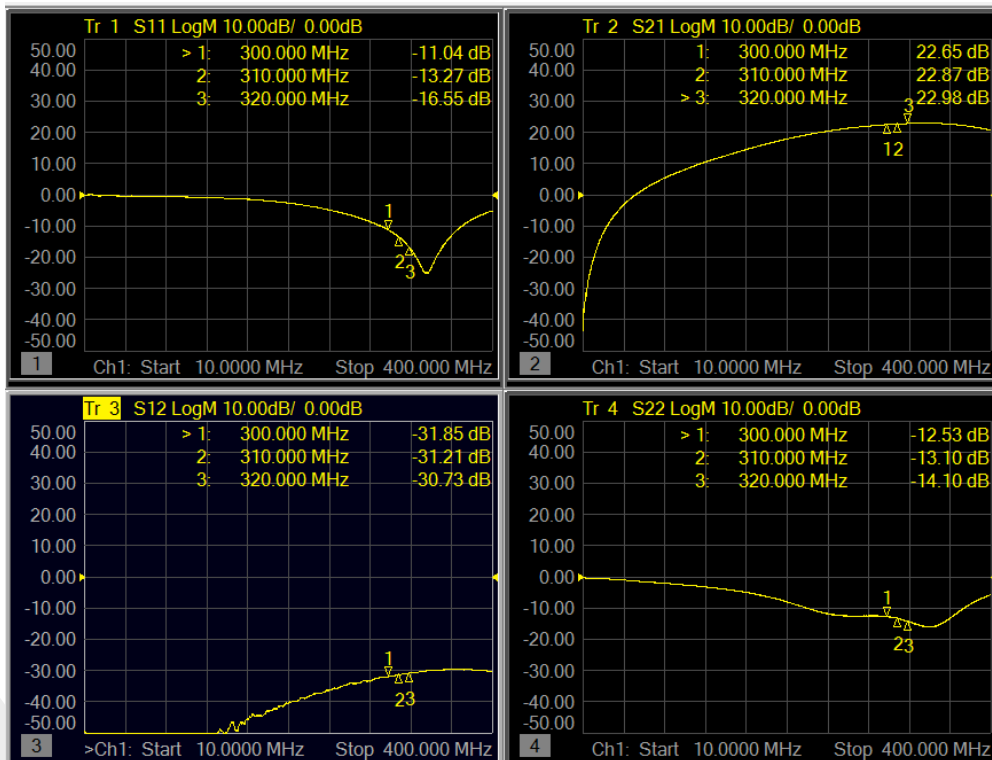


# GRF5115 Stability Mu Factor 5V 213mA :

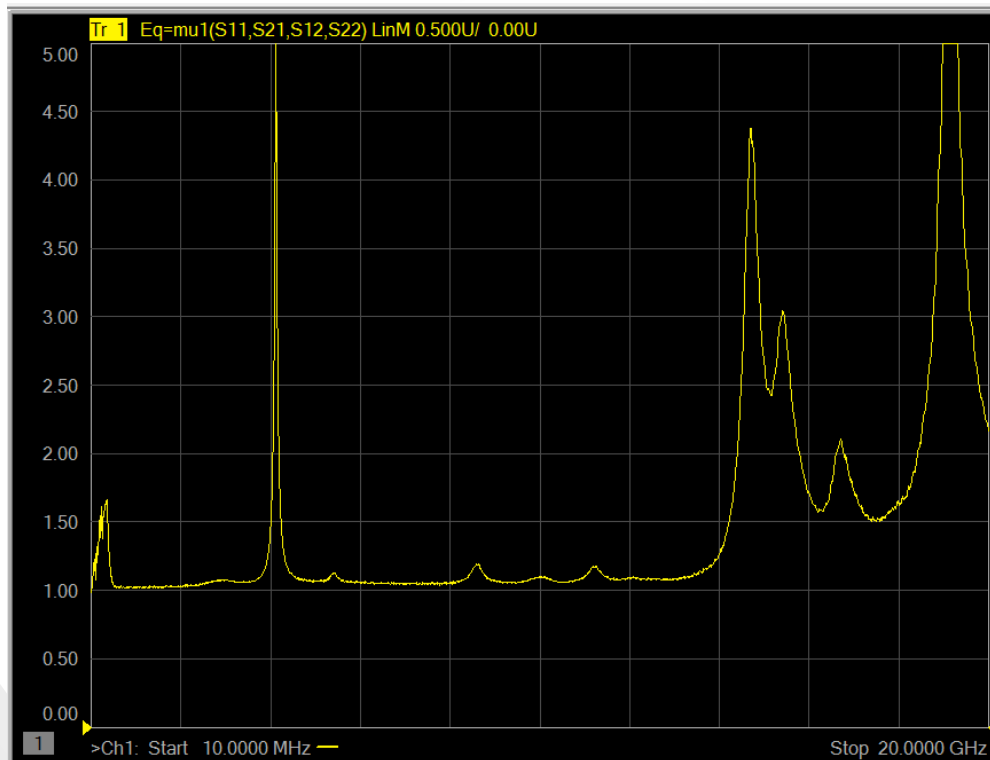


# GRF5115 Data: NF

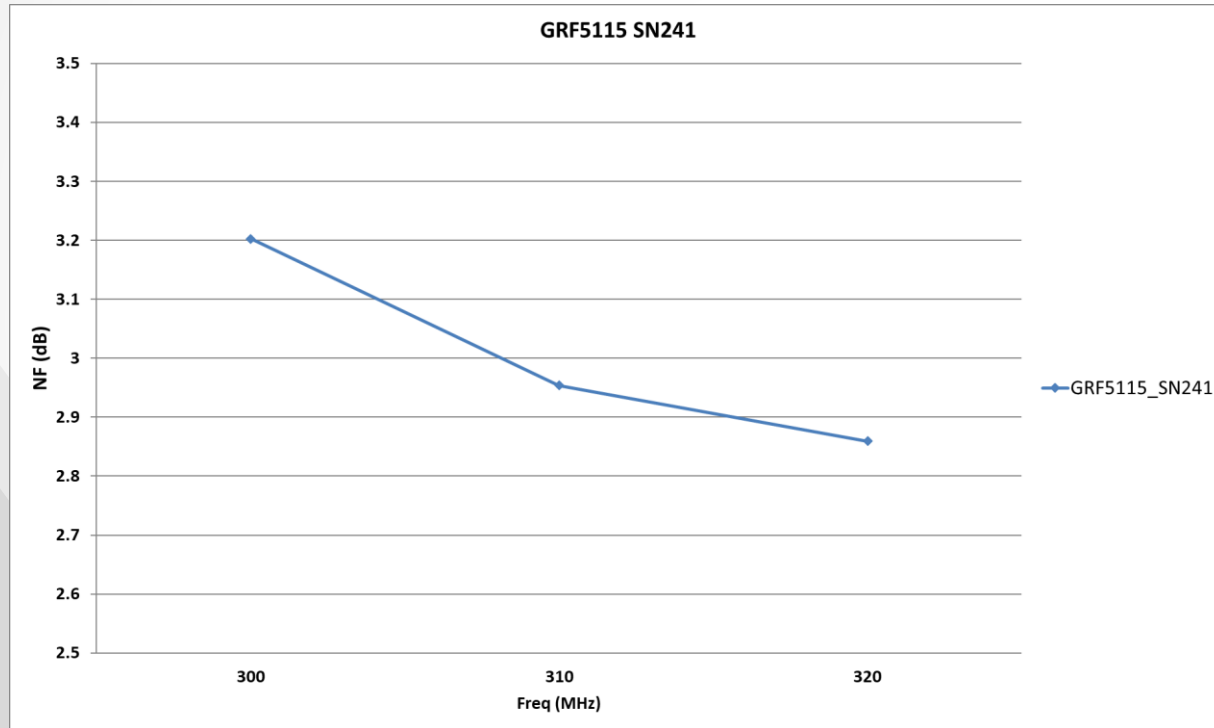


# GRF5115 Data: Gain

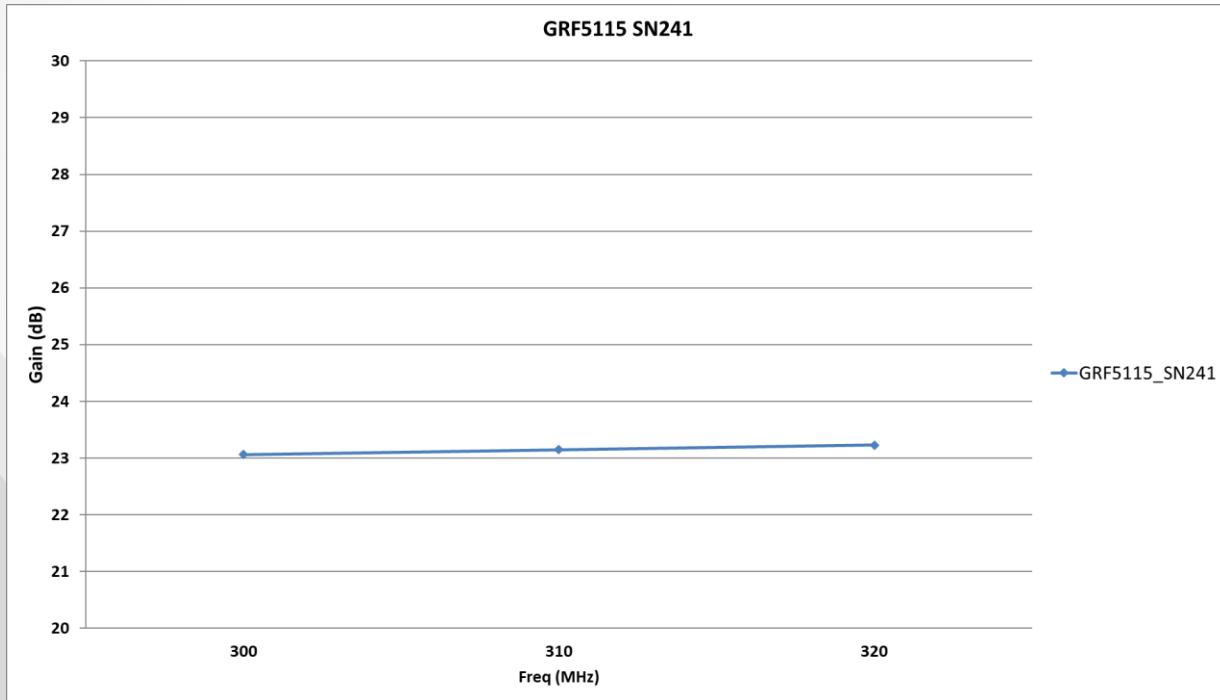

# GRF5115 Data: IIP3

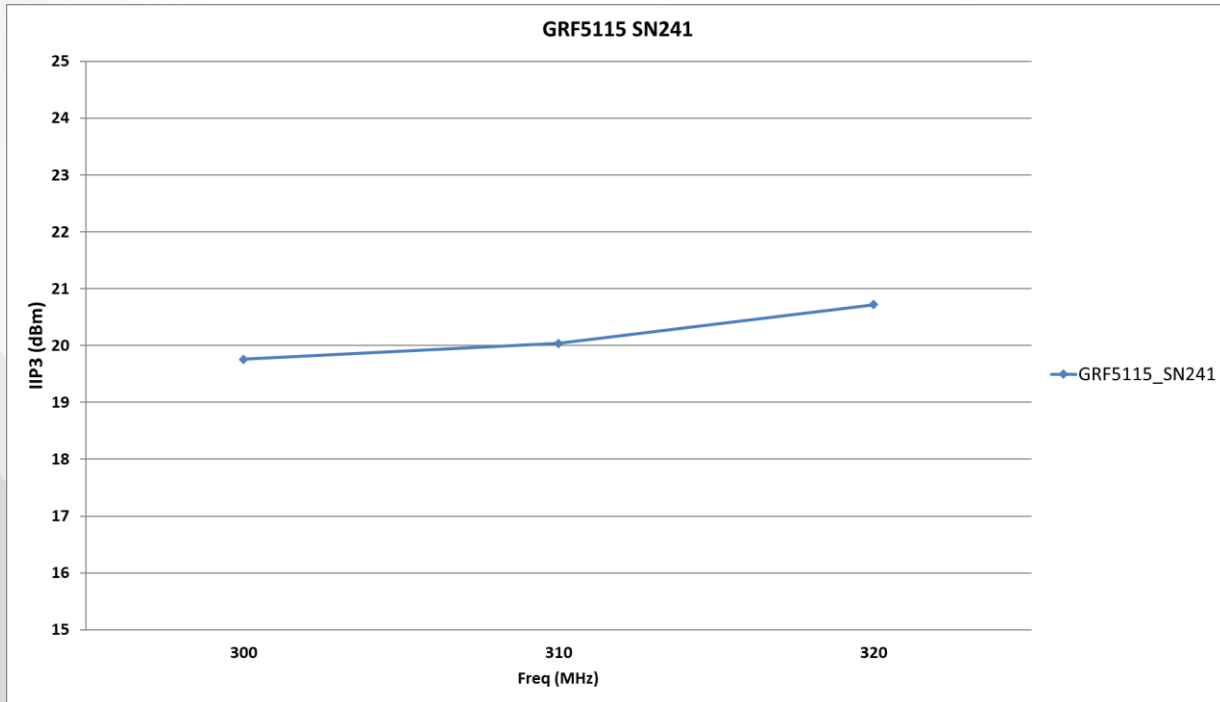


# GRF5115 Data: OIP3

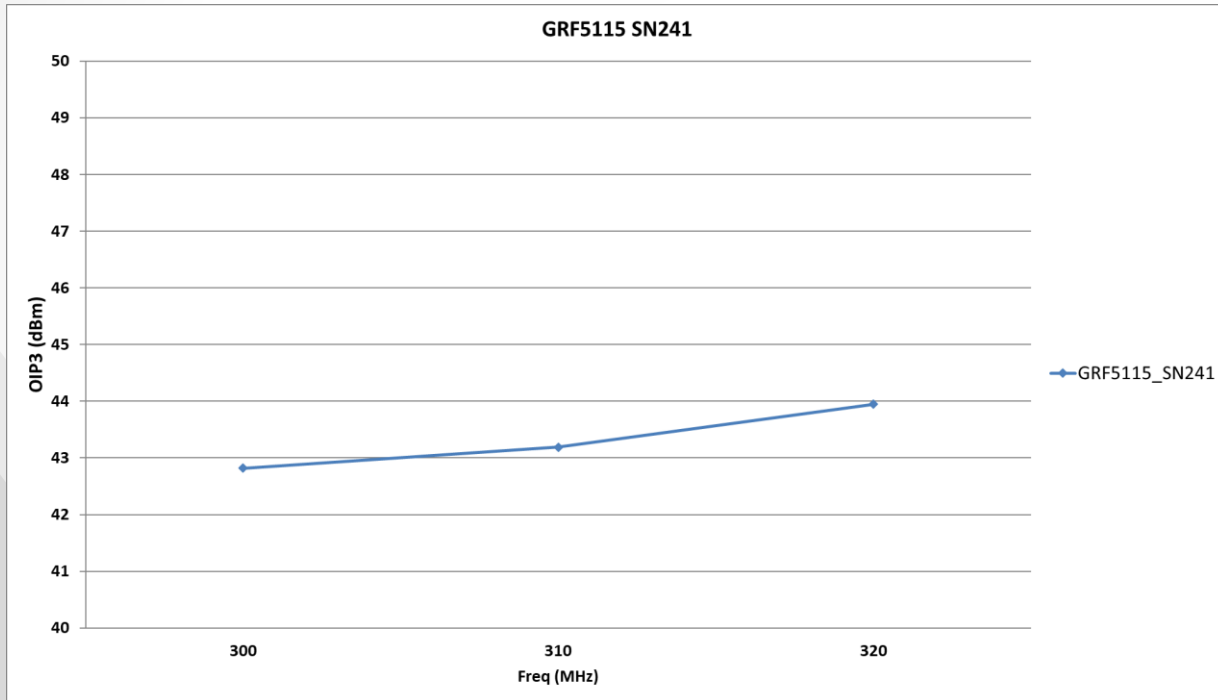




# GRF5115 Data: IP1dB

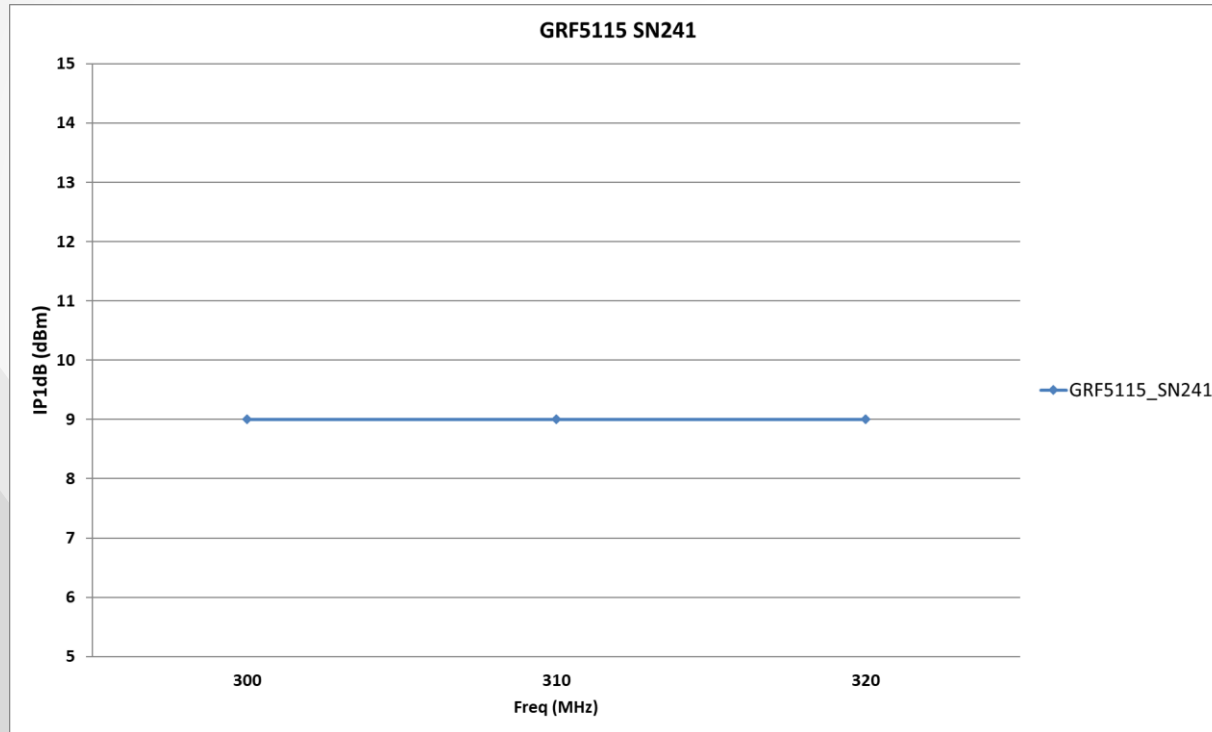

# GRF5115 Data: OP1dB

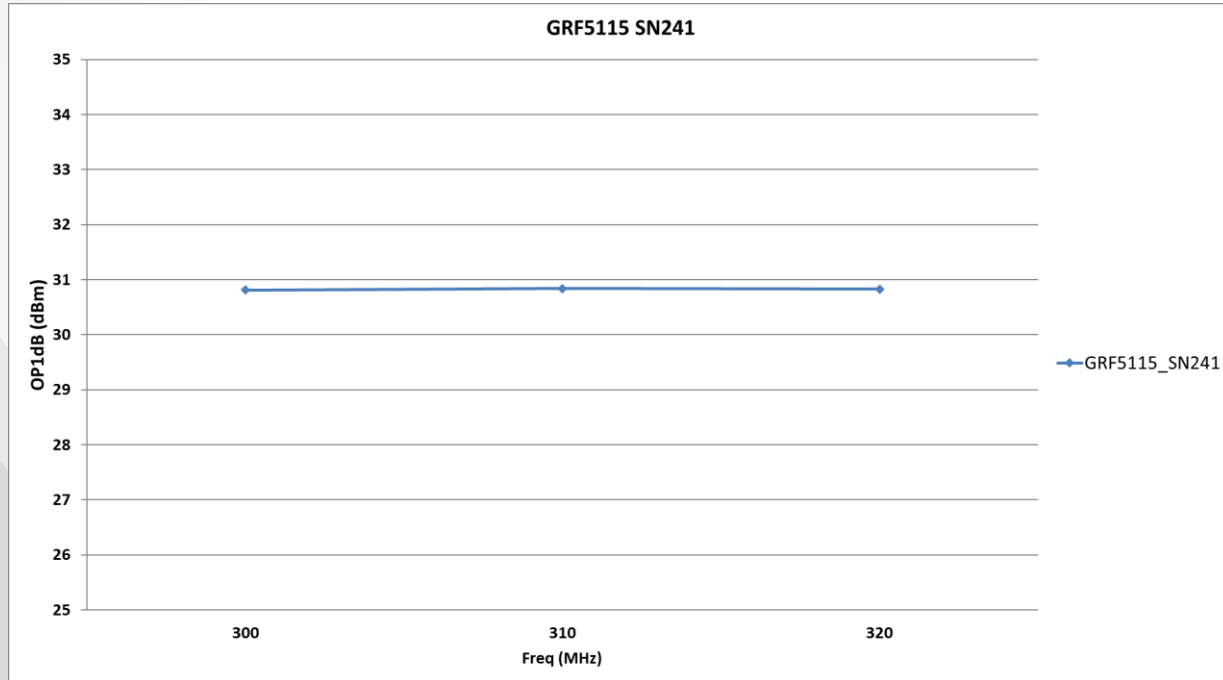

# GRF5115 Data:

descriptor	freq MHz	Vdd	Iddq mA	Ven	Pout/Ptone dBm	Gain dB	IIP3 dBm	OIP3 dBm	IP1dB dBm	OP1dB dBm	NF
GRF5115_SN241	300	5	213.71	5	15	23.06	19.76	42.82	9	30.81	3.20
GRF5115_SN241	310	5	213.46	5	15	23.15	20.04	43.19	9	30.84	2.95
GRF5115_SN241	320	5	213.7	5	15	23.23	20.72	43.95	9	30.83	2.86



## **Jeff Broxson**

*Vice President - Sales*

Phone (336) 339-9314

[jbroxson@guerrilla-rf.com](mailto:jbroxson@guerrilla-rf.com)

## **Alan Ake**

*Vice President - Applications/Technical Marketing*

Phone (336) 708-4581

[aake@guerrilla-rf.com](mailto:aake@guerrilla-rf.com)

## **Guerrilla RF**

1196 Pleasant Ridge Road, Suite 5  
Greensboro, NC 27409

Phone: (336) 510-7840

[www.guerrilla-rf.com](http://www.guerrilla-rf.com)